


# TSI 150AC-8

Compact Crawler-Mounted Articulating Sonic Drill Rig



## FEATURES

- Exclusive Sonic Oscillator uses 150 Hz to generate resonant sonic energy with 222 kN (50,000 lbf) of force.
- Rated drilling depth of 300 m (1,000 ft) with 6" tooling, depending on lithology
- Accommodates 3 m (10 ft) sections of tooling
- Capable of drilling with up to 12" (305 mm) casing
- Angle drilling from -25° to 120° (0° Vertical) in any direction
- The radio remote control panel can be tripod-mounted or used with the included padded shoulder sling



## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

# SPECIFICATIONS

### RIG PERFORMANCE

- **Rated Drill Depth:** Up to 300 m (1,000 ft) in 6" Depending on Lithology
- **Max Drilling Diameter:** 305 mm (12 in) Casing
- **Pull Back Force:** 80 kN (17,958 lbf) Below the Head
- **Down Force:** 58 kN (13,035 lbf) Below the Head
- **Max Tooling Length:** 3 m (10 ft)

### SONIC HEAD

- **SONIC Head Model:** TSi 150
- **Oscillator Frequency:** 0-150 Hz
- **Oscillator Output Force:** 222 kN (50,000 lbf)
- **Oscillator Dampening System:** Active Air Spring
- **Max Torque:** 6,341 Nm (4,677 ft-lb) in both directions
- **Rotation Speed:** 0 to 62 rpm
- **Head Tilt:** 80° Forward
- **Head Safety Monitoring System:** Oil, Air & Bearing Pressure, Oil Level & Oil Temperature, Filter Clogging

### TRANSPORT DIMENSIONS

- **Width:** 2.2 m (7 ft 3 in)
- **Length:** 8.65 m (28 ft 5 in)
- **Height:** 3.47 m (11 ft 5 in)
- **Weight:** 19,000 kg (41,888 lbs)
- **Ground Clearance:** 305 mm (12 in)

### ENGINE

- **Engine:** Deutz, Model TCD 6.1 L6, 6 Cylinder Diesel, Stage V (Tier 4 Final)
- **Engine Power:** 180 kW (245 HP)
- **Fuel Capacity for Drilling/Transport:** 170 L (45 gal)
- **Air Compressor:** 450 l/min (15.9 CFM) and 12 Bar (174 PSI)
- **Air Tank:** 24 liters (6.3 US Gal)
- **Engine Sound Proofing Enclosure:** Noise Emission Levels as per Directive 2000/14/EC
- **Engine Monitor Mounted in Rig Control Panel**

### HYDRAULIC SYSTEM

- **Hydraulic Oil Tank Capacity:** 514 L (135 gal)
- **Oil Cooling System:** Double Air-Oil Heat Exchangers with Thermostat Control for Hydraulic Oil and Sonic Head Lubrication Oil
- **Hydraulic Pumps:** Variable Displacement Load Sensing Axial Piston Pumps and Fixed Displacement Gear Pumps
- **Filter System:** 6 Micron on Pressure and Return
- **Electro-Hydraulic Controls & Manual Setup Functions**

### MAST

- **Head Travel/Stroke:** 4.40 m (14 ft 5 in)
- **Up Head Travel Speed:** 0 to 48 m/min (0 to 158 ft/min)
- **Down Head Travel Speed:** 0 to 28 m/min (0 to 89 ft/min)
- **Drilling Angle:** Variable, Depending upon Articulation Positioning
- **Hose Carrier:** Hose Support Chain on Side of Mast
- **Safety Cage:** Anti-Intrusion Infrared Barrier and Restricted Operating Mode (ROM)

### DECK

- **Jack Legs:** Two front (Engine side) hydraulic stabilizers 190 mm × 125 mm (7-1/2 in × 5 in) and two rear (mast side) jacklegs 95 mm × 400 mm (3-3/4 in × 15-3/4 in), complete with check valves and located at deck corners

### JIB & WINCHES

- **Main winch Hoist Capacity:** 31 kN (6,970 lbf)
- **Main winch Cable:** 30 m (98 ft) of 12 mm (1/2 in) Steel Cable
- **JIB Rotation Angle:** 90° Left, Manually Operated
- **Service winch Hoist Capacity:** 3 kN (764 lbf)
- **Service winch Cable:** 10 m (32 ft 10") of 6 mm (1/4 in) Steel Cable

### CRAWLER

- **Track Width:** 400 mm
- **Crawler Type:** Steel with Rubber Pads
- **Speed:** Dual Speed, 2.2 or 4.0 km/h (1.25 or 2.5 mph)
- **Ground Pressure:** 80 kPa (11.6 PSI)
- **Control:** From Drilling Radio Remote Control

### BREAKOUT WRENCH

- **Top and Bottom Wrenches:** Dual Clamping Cylinders
- **Bottom Wrench Clamping Cylinders:** Lock Valves Incorporated in Hydraulic Circuit
- **Wrench Clamp Force:** Adjustable Pressure Control Preset at 153.4 kN (34,500 lbf)
- **Breakout Torque:** 41,157 N-m (30,365 ft-lb) with Dual Cylinders
- **Wrench Size Range:** 76 mm (3 in) to 305 mm (12 in)
- **Wrench Travel/Swing:** 19°
- **Standard Hardened Teeth Inserts**

### WATER/MUD & WASHING SYSTEM

- **Pump Type:** Front (Engine Side) Mounted FMC W1122 Bean Triplex Pump
- **Output Pressure:** 69 bar (1,000 psi) with Safety Relief Valve Set at 34.5 bar (500 psi)
- **Max Flow Rate:** 200 L/min (53 gpm)
- **Pressure Washer:** Max Flow 16 L/min (4.2 gal/min) Max Pressure 170 bar (2,465 PSI) Complete with 15 m (49 ft 3 in) hose, reel and Nozzle

### OTHER ITEMS


- **Radio Remote Control:** 2 Batteries, 1 On-Board Charger, 1 Umbilical Cord
- **Full Toolbox:** For drilling rig maintenance
- **Work Lights:** LED Lights on Mast, Control Panel and Inside Engine Sound Proof Enclosure
- **Emergency Stops:** 5 Emergency Stops: On all Sides of the Rig and Radio Remote
- **Technical Information:** Rig Supplied with Operation and Maintenance Manual, Paper and Interactive Spare Parts Catalogue and CE Declaration and Conformity.

### RIG OPTIONS

- Casing Clamp (3d clamp)
- Progressive Cavity Grout Pump 150 or 300 l/min (40 or 80 gpm)
- Custom Paint (requires RAL code)
- Other options on request


# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

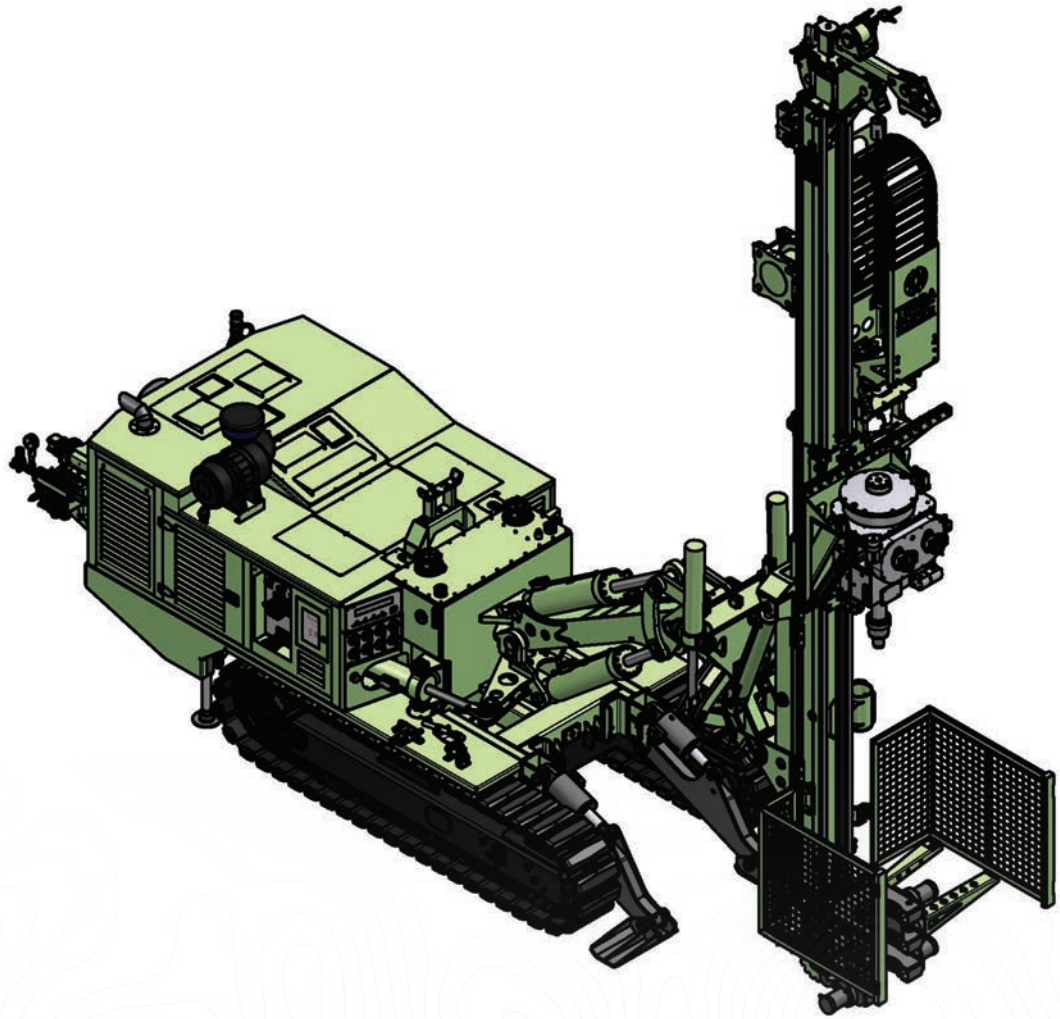


# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig






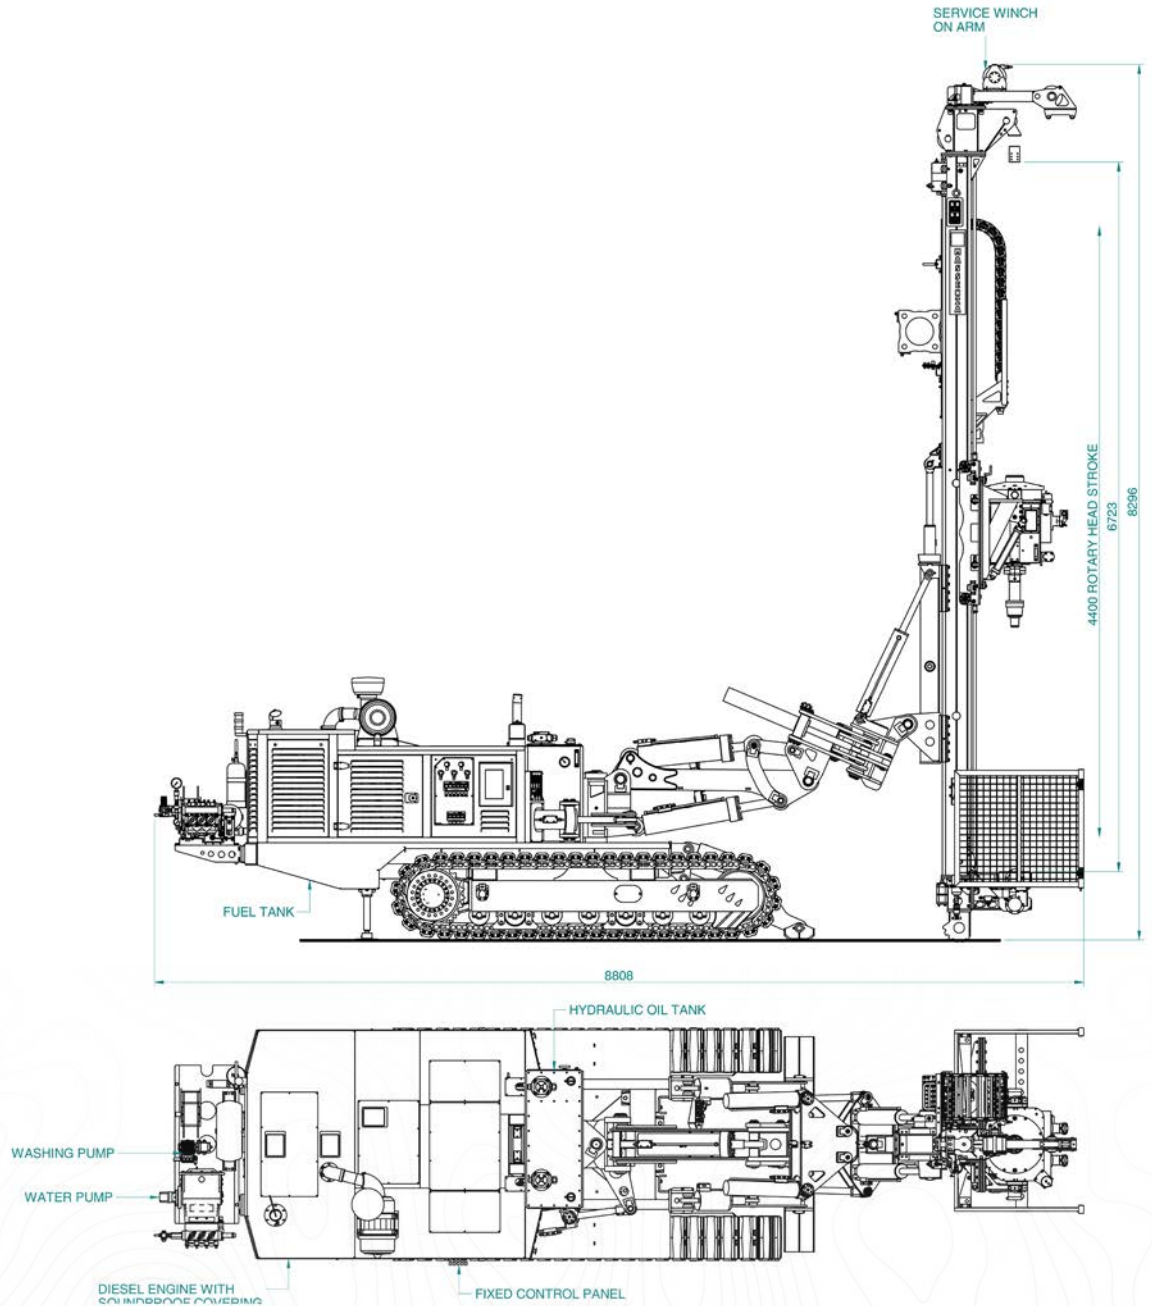


# TS1150AC-8







# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

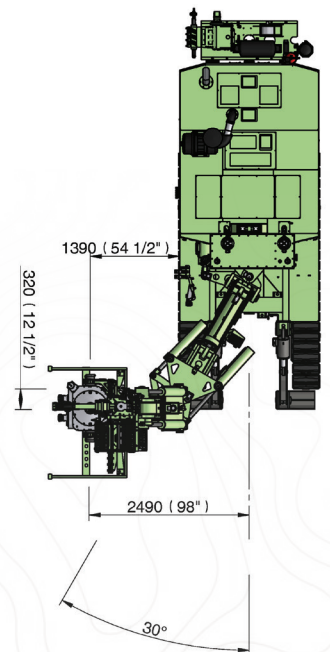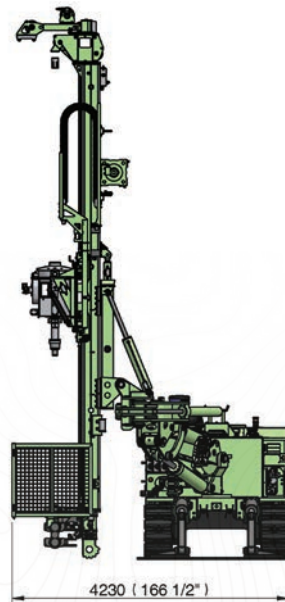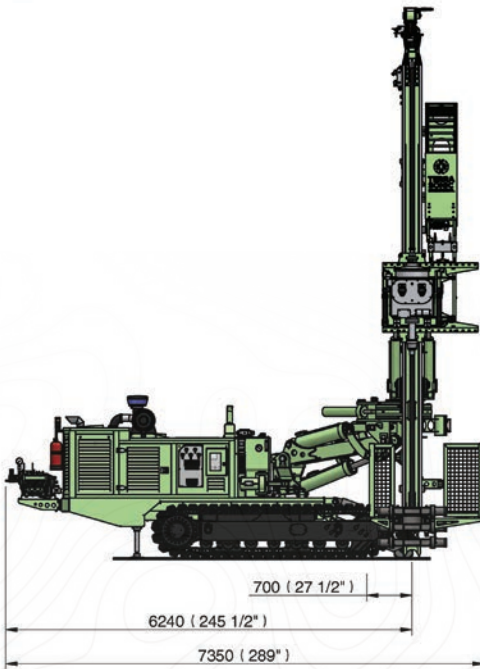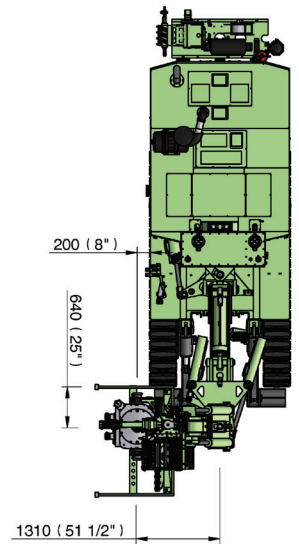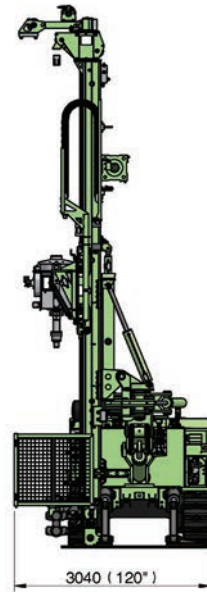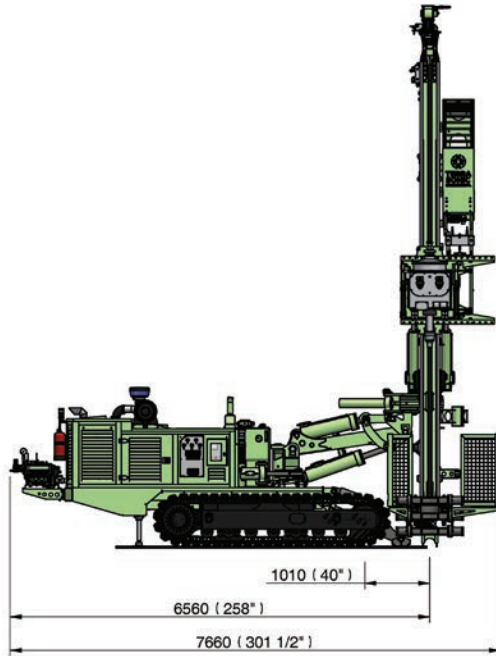


# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

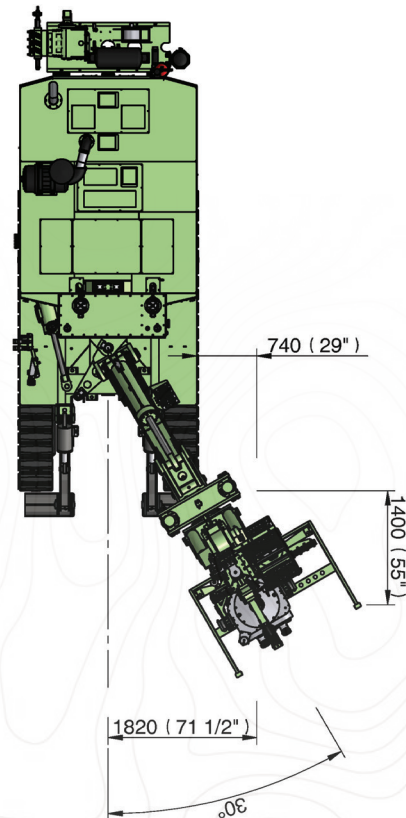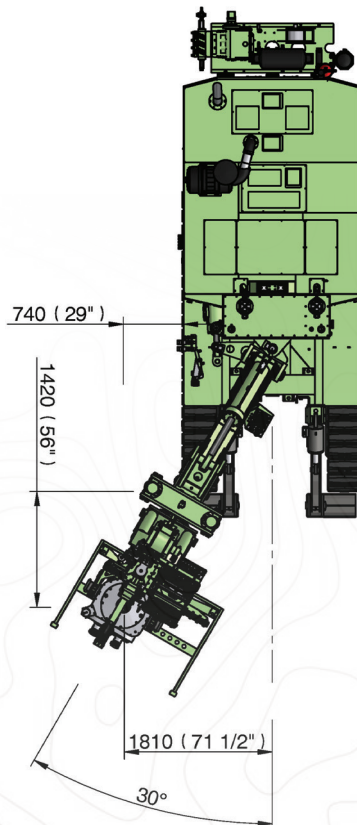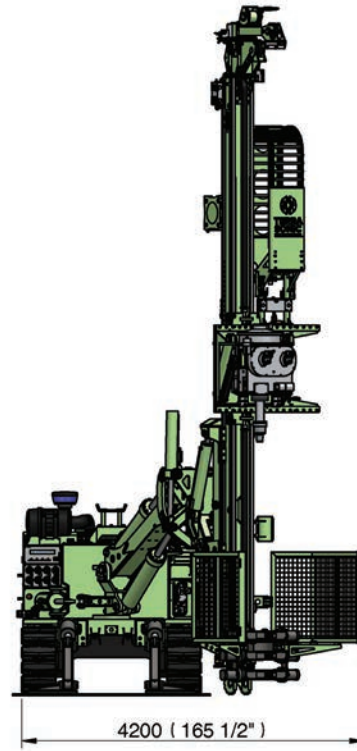
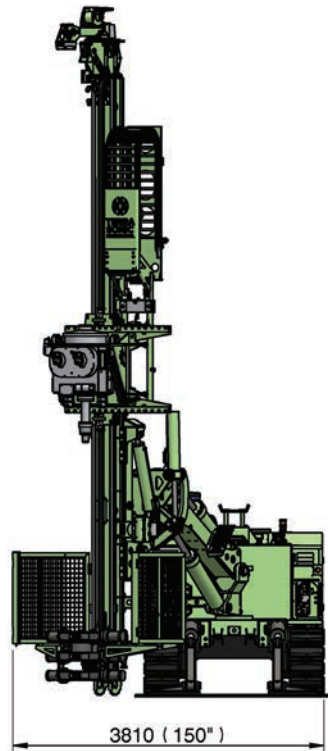


## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

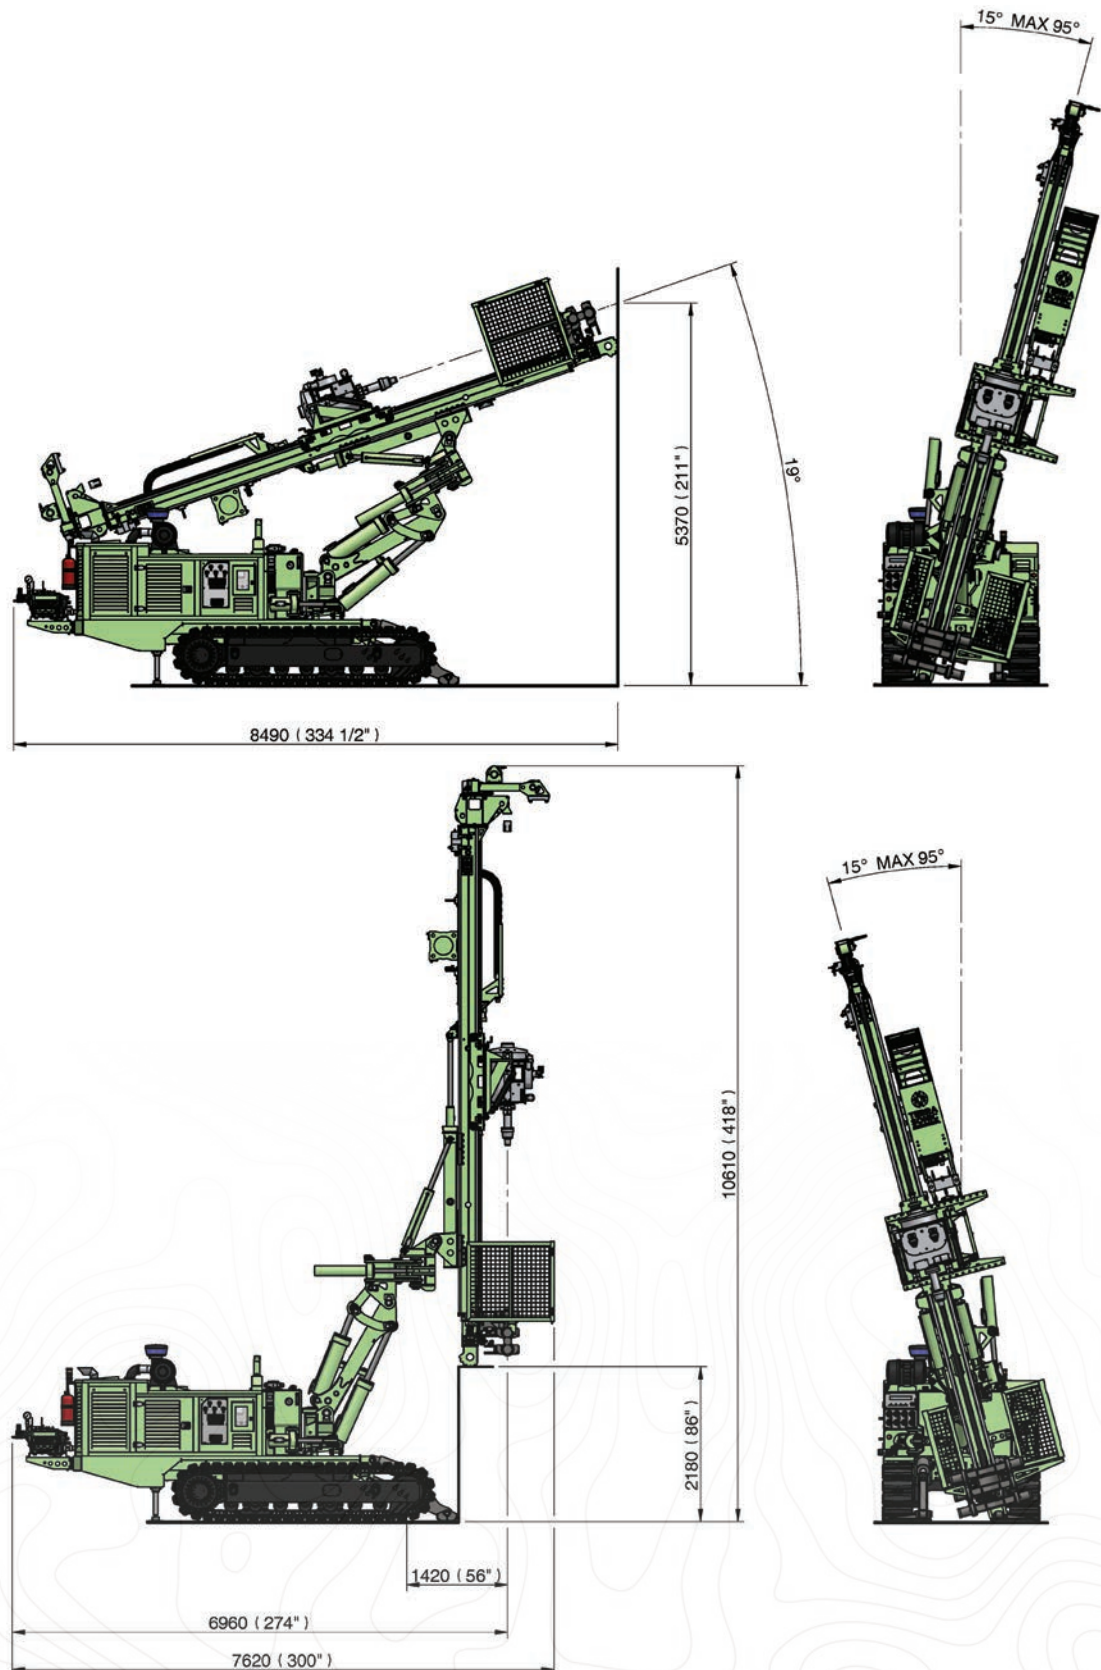




# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

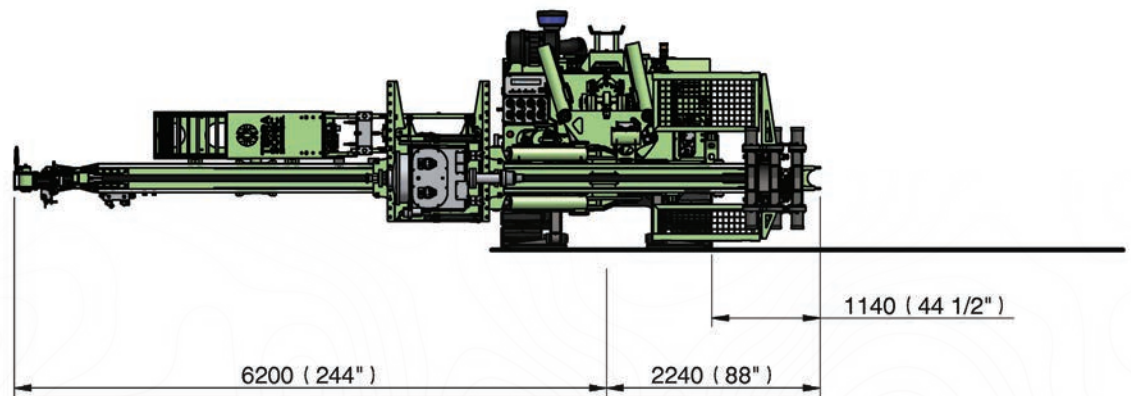
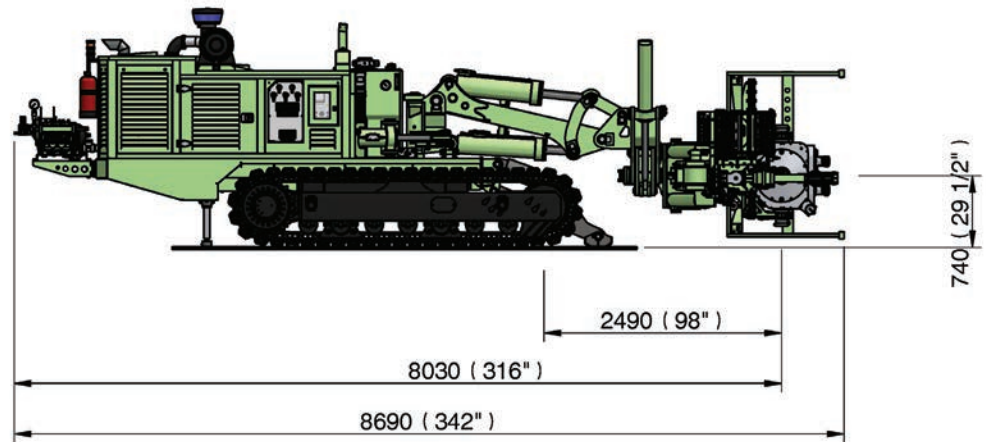


# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

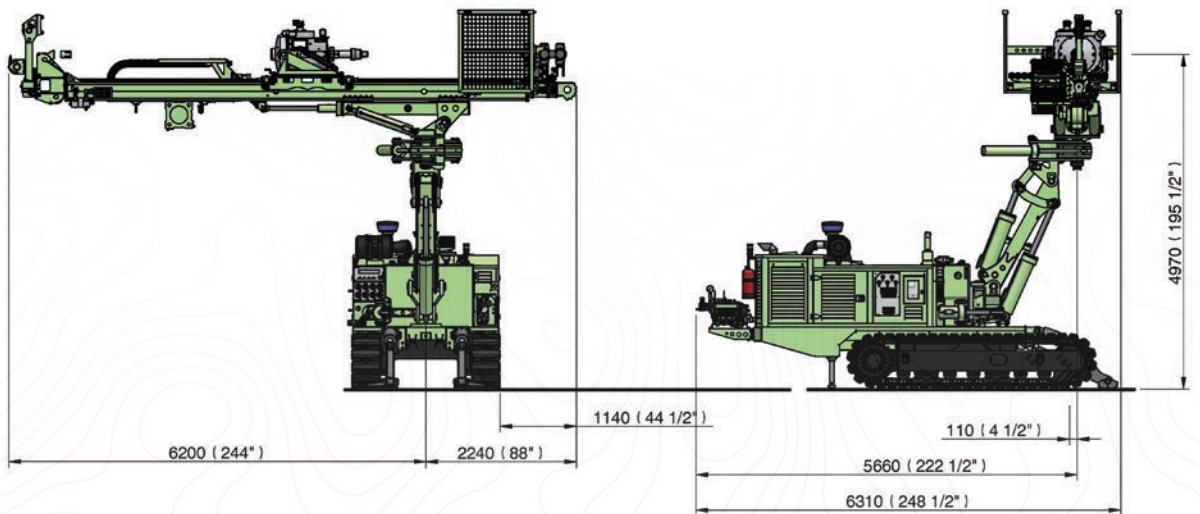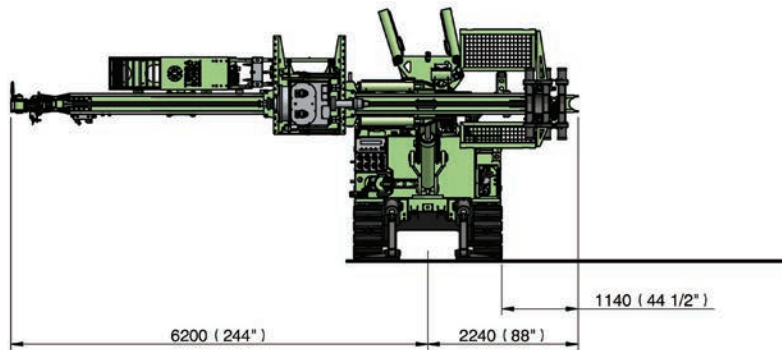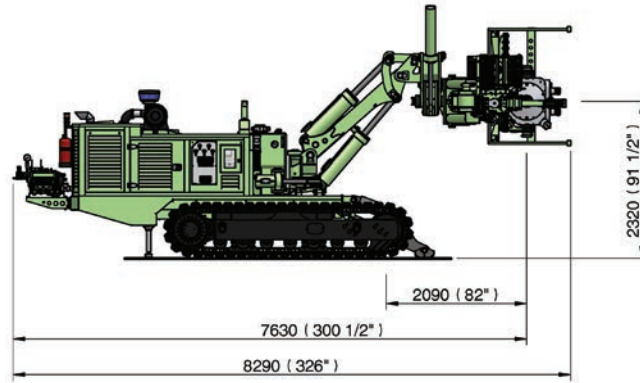

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

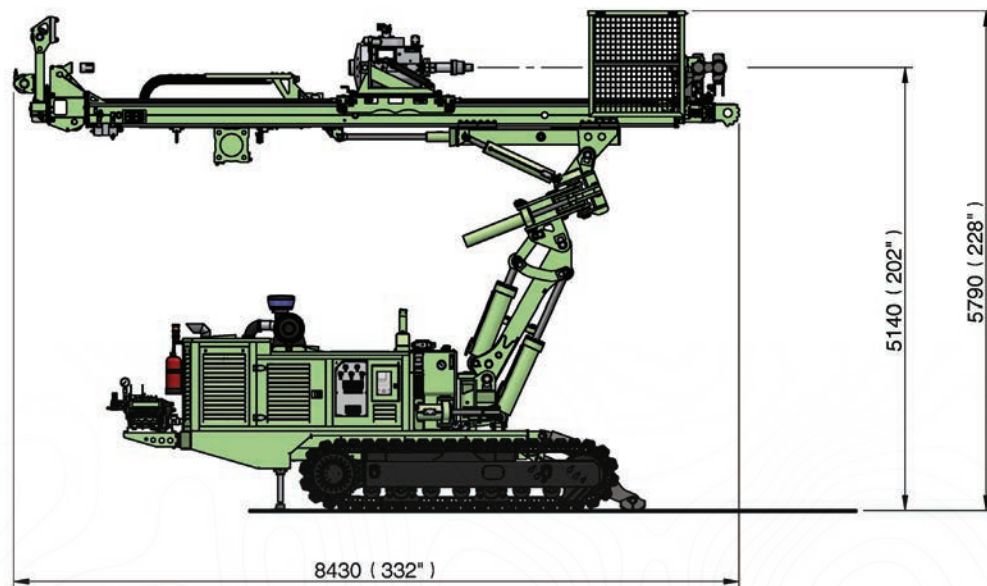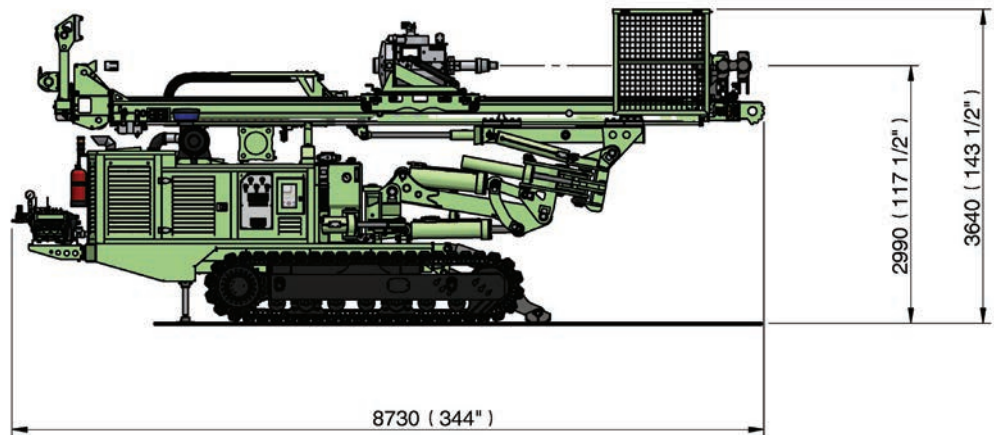

**TSI 150AC-8**

# TSI 150AC-8

## TSI 150AC-8 • Compact Crawler-Mounted Articulating Sonic Drill Rig

